NOVA LUCE

Supplier's name or trade mark: NOVA LUCE S.A
Supplier's address: SCHIMATARI VIOTIAS 32009, GREECE
Model identifier: 9223403
Type of light source: LED



Product information Sheet

General Information

Material number	**9223403**
Type	**Table light**
Product segment	

Dimensions

Diameter (in cm)	**11.4 Cm**
Width (in cm)	
Height (in cm)	**39.5 Cm**
Net Weight	

Material & Colour

Enclosure Material	**Aluminium**
Colour	**Sandy Brown**
Adjustable	**No**

Functionality

Switch Type	**Touch Lamp On/Off /Rechargeable with PG base or White USB Type C Wire**
Function	**LED (Dimmable)**
Battery	**Yes**
USB Wire	**Yes**

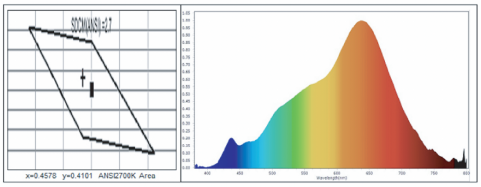
Technical Information

Protection Degree	**IP54**
Protection Class	**III**
Mains Voltage	**DC 5V**
max. Wattage	**2W**
Lumen	**192Lm**
Equivalence With Incandescent Lamp (W)	
Colour Temperature	**2700K**
Nominal Lifetime (in h)	**20000H**
Switching Cycles	**40000**
Colour Rendering Index (Ra, CRI)	
Rated Lamp Power (0,1W precision)	
Colour Tolerance (LED, SDCM)	

Product information

Lighting technology used [LED/OLED/MIXED/OTHER]	LED
Non-directional or directional [NDLS/DLS]	DLS
Mains or non-mains [MLS/NMLS]	NMLS
Connected light source (CLS) [yes/no]	No
Colour-tuneable light source [yes/no]	No
Envelope [no/second/non-clear]	No
High luminance light source [yes/no]	No
Anti-glare shield [yes/no]	
Dimmable [yes/only with specific dimmers/no]	YES

General Product parameters

Energy consumption in on-mode (kWh/1000h)	
Energy efficiency class	
Useful luminus flux (Φ_{use}), indicating if it refers to the flux in a sphere (360˚), in a wide cone (120˚) or in a narrow cone (90˚)	
Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100K, that can be set :	
On-mode power (P_{on}), expressed in W [x,x]	
Standby power (P_{sb}), expressed in W and rounded to the second decimal	0
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0
Colour rendering index, rounded to the nearest integer , or the range of CRI values that can be set	
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre):	Complete light
Spectral power distri bution in the range 250 nm to 800 nm, at full-load	
Claim of equivalent power (c)	
If yes, equivalent power (W)	
Chromaticity coordinates (x and y)	

Parameters for directional light sources

Peak luminous intensity (cd)	
Beam angle in degrees, or the range of beam angles that can be set	
Beam Angle in degrees for directional light source	

Parameters for LED and OLED light sources

R9 colour rendering index value	
Survival factor [x,xx]	100%
The lumen maintenance factor [x,xx]	99%
Displacement factor (cos φ1) for LED and OLED mains light sources	
Colour consistency in MacAdam ellipse steps for LED and OLED light sources	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular Wattage	
If yes then replacement claim (W)	
Flicker metric (PstLM) for LED and OLED light sources	
Stroboscopic effect metric (SVM) for LED and OLED light sources	
Pon in W	0